
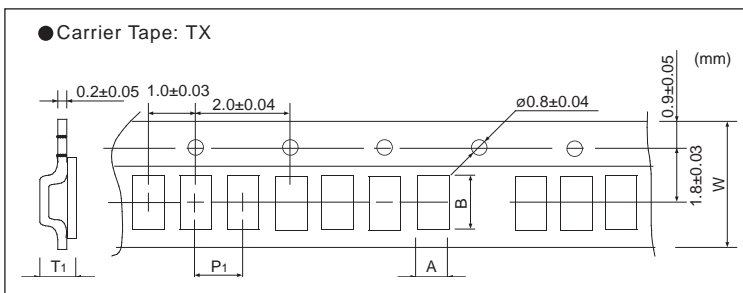


For Product Specific packaging, please refer to the individual product data sheets.

Type		Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size øa (mm)	
		L	W	T			A	B	W	P1	T1		
RK73B RK73H RK73G RK73Z RS73 HSG73P HV73 SG73 SG73P SG73S SR73 RF73	1F	0.4	0.2	0.13	TX	40,000	0.25±0.04	0.45±0.04	4	1	0.40±0.1	180	
	1H	0.6	0.3	0.23	TBL	20,000	0.25±0.04	0.45±0.04	8	2	0.31±0.1	180	
	1E	1.0	0.5	0.35	TCM	15,000	0.37±0.05	0.67±0.05	8	2	0.42±0.1	180	
	1J	1.6	0.8	0.45	TP	20,000	0.65±0.10	1.15±0.10	8	2	0.42+0.2/-0	180	
					TD	5,000							0.6+0.2/-0
	2A	2.0	1.25	0.5	TP	10,000	1.65±0.20	2.4±0.2	8	2	0.75+0.2/-0	180	
					TD	5,000							0.75+0.2/-0
	2B	3.2	1.6	0.6	TE	4,000	1.6±0.2	2.4±0.2	8	4	0.9±0.1	180	
					TD	5,000							0.75+0.2/-0
	2E1	3.2	2.6	0.6	TE	4,000	1.9±0.2	3.5±0.2	8	4	1.0±0.1	180	
					TD	5,000							0.75+0.2/-0
	W2H, 2H	5.0	2.5	0.6	TE	4,000	2.85±0.20	3.5±0.2	8	4	0.75+0.2/-0	180	
TE					4,000	2.85±0.20							3.5±0.2
W3A2, W3A, 3A	6.3	3.1	0.6	TE	4,000	2.9±0.2	5.35±0.20	12	4	1.0±0.15	180		
				TE	4,000							3.44±0.20	6.65±0.20
RN73H RN73R LT73 LT73V	1E	1.0	0.5	0.35	TP	10,000	0.65±0.10	1.15±0.10	8	2	0.42+0.2/-0	180	
	1J	1.6	0.8	0.45	TD	5,000	1.1±0.1	1.9±0.1	8	4	0.6+0.2/-0	180	
	2A	2.0	1.25	0.5	TD	5,000	1.65±0.20	2.4±0.2	8	4	0.75+0.2/-0	180	
					TE	4,000	1.6±0.2	2.4±0.2	8	4	1.0±0.15		
	2B	3.2	1.6	0.6	TD	5,000	2±0.2	3.5±0.2	8	4	0.75+0.2/-0	180	
					TE	4,000	1.9±0.2	3.5±0.2	8	4	1.0±0.15		
2E	3.2	2.5	0.6	TD	5,000	2.85±0.20	3.5±0.2	8	4	0.75+0.2/-0	180		
UR73 UR73V	D1E	1.0	0.5	0.4	TP	10,000	0.65±0.10	1.15±0.10	8	2	0.5+0.2/-0	180	
	D1J	1.6	0.8	0.5	TD	5,000	1.1±0.1	1.9±0.1	8	4	0.68+0.2/-0	180	
	D2A	2.0	1.25	0.55	TD	5,000	1.65±0.2	2.4±0.2	8	4	0.75+0.2/-0	180	
					TD	5,000							
	D2B	3.2	1.6	0.6	TD	5,000	2±0.2	3.5±0.2	8	4	0.75+0.2/-0	180	
					TD	5,000							
	D2H	5.0	2.5	0.65	TE	4,000	2.9±0.2	5.35±0.20	12	4	1.0±0.15	180	
	D3A	6.3	3.1	0.6	TE	4,000	3.44±0.20	6.65±0.20	12	4	1.0±0.15	180	
	WK73 WU73 WG73	1E	0.5	1.0	0.35	TP	10,000	0.65±0.10	1.15±0.10	8	2	0.42+0.2/-0	180
		1J	0.8	1.6	0.45	TD	5,000	1.1±0.1	1.9±0.1	8	4	0.6+0.2/-0	180
2A		1.25	2.0	0.55	TD	5,000	1.65±0.20	2.4±0.2	8	4	0.75+0.2/-0	180	
2B15, 2B		1.6	3.2	0.6	TD	5,000	2.0±0.2	3.5±0.2	8	4	0.75+0.2/-0	180	
2H2, 2H		2.5	5.0	0.6	TE	4,000	2.9±0.2	5.35±0.20	12	4	1.0±0.15	180	
WN73H	3A3, 3A	3.1	6.3	0.6	TE	4,000	3.44±0.20	6.65±0.20	12	4	1.0±0.15	180	
	1J	0.8	1.6	0.35	TD	5,000	1.1±0.1	1.9±0.1	8	4	0.6+0.2/-0	180	
SLR	1	6.3	3.1	1.9	TD	5,000	2±0.2	3.5±0.2	8	4	0.75+0.2/-0	180	
					TE	1,000	3.6±0.1	6.8±0.1	12	8	2.35±0.1	180	
MWS	5	16.9	8.6	4.8	TE	2,000	3.55±0.10	6.75±0.10	12	8	1.0±0.1	255	
PS	L (0.2mΩ)	6.3	3.15	1.40	TEG	1,500	8.90±0.10	17.3±0.10	24	12	5.1±0.10	380	
	L (0.3mΩ)	6.3	3.15	1.32	TEB	5,000	3.45±0.1	6.60±0.1	12	8	1.6±0.1	330	
	L (0.5mΩ)	6.3	3.15	1.12	TEB	5,000	3.45±0.1	6.60±0.1	12	8	1.6±0.1	330	
	F (0.5mΩ)	3.0	3.8	1.8	TEB	3,000	3.25±0.1	4.25±0.1	12	8	2.2±0.1	330	
	F (1mΩ)	3.0	3.8	1.8	TEB	3,000	3.25±0.1	4.25±0.1	12	8	2.2±0.1	330	
TLR	2A	2.0	1.25	0.25	TD	5,000	1.65±0.1	2.4±0.1	8	4	0.42+0.2/-0	178	
	2BN, 2B, 2BW, 2BP	3.2	1.6	0.6	TD	5,000	2.0±0.10	3.5±0.10	8	4	0.75±0.05	180	
	2H, 2HW	5.0	2.5	0.6	TE	4,000	2.9±0.10	5.35±0.10	12	4	0.77±0.1	180	
	3AW, 3AP, 3APS	6.4	3.2	0.6	TE	2,000	3.55±0.10	6.75±0.10	12	8	1.0±0.1	180	

RK73 series fit for ø255 and ø330 reels, and RN73 series for ø255 reel. For further details, please refer to individual specification sheets.

### Packaging specifications

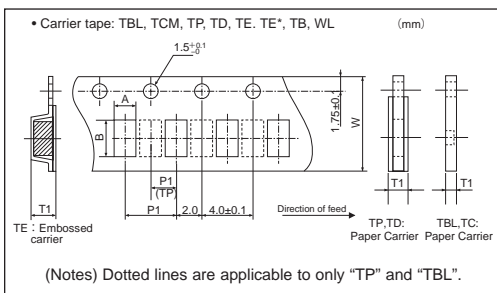

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


5/08/24

For Product Specific packaging, please refer to the individual product data sheets.

Type	Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size øa (mm)	
	L	W	T			A	B	W	P1	T1		
TLRZ	1E	1.0	0.5	0.4	TB	10,000	0.65±0.1	1.15±0.1	8	2	0.6±0.03	180
	1J	1.6	0.8	0.5	TD	5,000	1.10±0.1	1.90±0.1	8	4	0.6±0.05	180
	2A	2.0	1.25	0.5	TD	5,000	1.65±0.2	2.40±0.1	8	4	0.75±0.05	180
	2B	3.2	1.6	0.5	TD	5,000	2.0±0.10	3.5±0.10	8	4	0.75±0.05	180
TLRH	2A	2.0	1.25	0.25	TD	5,000	1.65±0.1	2.4±0.1	8	4	0.42+0.2/-0	178
	3AW, 3AP	6.3	3.2	0.5	TE	2,000	3.55±0.20	6.75±0.20	12	8	1.0±0.1	178
SL	07, W07	5.0	2.5	1.7	TE	2,000	3.1±0.1	5.5±0.1	12	4	2.25±0.10	180
	1, W1	6.3	3.1	1.9	TE	1,000	3.6±0.1	6.8±0.1	12	8	2.35±0.10	180
	2	11.5	7.0	2.5	TED	1,000	7.7±0.1	12.2±0.10	24	12	3.1±0.1	255
SLN	2, 3	11.5	7.0	2.4	TED	1,000	7.7±0.1	12.2±0.10	24	12	3.1±0.1	255
	5	11.5	7.0	2.5	TED	1,000	7.7±0.1	12.2±0.10	24	12	3.1±0.1	255
TSL	1	6.3	3.1	1.0	TE	3,000	3.4±0.1	6.6±0.1	12	4	1.3±0.1	180
CSR	1	10.8	6.2	2.1	TE	1,000	6.7±0.1	11.1±0.10	24	12	2.60±0.10	255
	2	12.8	8.2	3.1	TE	1,000	9±0.1	13±0.10	24	12	4.35±0.10	330
LP73	1J	1.6	0.8	0.5	TE	5,000	1.1±0.1	1.9±0.1	8	4	0.6±0.1	180
	2A	2.0	1.25	0.5	TE	5,000	1.6±0.1	2.4±0.1	8	4	0.85+0.2/-0	180
	2B	3.2	1.6	0.5	TE	5,000	2.0±0.1	3.6±0.1	8	4	0.85+0.2/-0	180
SDT73H SDT73S SDT73V	2B	3.2	1.6	0.5	TEK/TE	1,000/5,000	2.0±0.1	3.6±0.1	8	4	0.85+0.2/-0	180
RD41	2ES, 12M	3.5	1.4	—	TE	3,000	1.7±0.1	3.7±0.1	8	4	2.0 max.	178
RN41, CC	2E, 25, 3AS	5.9	2.2	—	TE	1,500	2.4±0.1	6.2±0.1	12	4	2.9 max.	178
RCU		1.6	0.8	1.15	TE/TED	2,000/5,000	1.05±0.15	1.85±0.15	8	4	1.25±0.1	178/260
RCT		2.0	1.25	1.45	TE/TED	2,000/5,000	1.65+0.1/-0.2	2.45±0.15	8	4	1.70±0.1	178/260
RCS		3.2	1.6	1.25	TE/TED	2,000/5,000	2.0±0.2	3.6±0.2	8	4	1.45±0.15	178/260
RCW		3.2	1.6	2.0	TE	2,000	1.95+0.1/-0.05	3.4+0.1/-0.05	8	4	2.2±0.1	178
CNN	2A2	2.54	2.0	0.5	TE	4,000	2.4±0.2	2.9±0.2	8	4	1±0.15	180
KPC	Q16	4.9	5.99	1.6	TE	2,500	6.5±0.1	5.3±0.1	12	8	2.1±0.1	330
	Q20	8.66	5.99	1.6	TE	2,500	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330
	Q24	8.66	5.99	1.6	TE	2,500	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330
	N08	4.83	5.99	1.6	TE	2,500	6.5±0.1	5.3±0.1	12	8	2.1±0.1	330
	N14	8.66	5.99	1.6	TE	2,500	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330
	N16	9.91	5.99	1.6	TE	2,500	6.5±0.1	10.3±0.1	16	8	2.1±0.1	330
	S03	2.92	2.30	0.95	TE	3,000	3.15±0.1	2.77±0.1	8	4	1.22±0.1	180
HVDP08		8.66	5.99	1.6	TE	2,500	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330
NV73 NV73DL	1H	0.6	0.3	0.3	TBM	15,000	0.38±0.02	0.68±0.02	8	2	0.42±0.02	180
	1E	1.0	0.5	0.5	TP	10,000	0.65±0.1	1.15±0.1	8	2	0.6+0.2/-0	180
	1J	1.6	0.8	0.8	TE	2,500	1.2±0.1	1.9±0.1	8	4	1.75 max.	178
	2A	2.0	1.25	1.3 max.	TE	2,500	1.6±0.1	2.4±0.1	8	4	1.75 max.	178
	2B	3.2	1.6	1.65 max.	TE	2,500	2.0±0.1	3.6±0.1	8	4	1.75 max.	178
NV73S	2E	3.2	2.5	1.3	TE	2,000	2.85±0.1	3.50±0.1	8	4	1.55 max.	178
	2J	4.5	3.2	1.3	TE	1,000	3.60±0.1	4.90±0.1	12	8	2.05 max.	180
	2L	5.7	4.7	1.3	TE	1,000	5.40±0.1	6.00±0.1	12	8	2.60 max.	180
	2L H	5.7	4.7	2.5	TE	1,000	5.40±0.1	6.00±0.1	12	8	2.60 max.	180
TF	10B	1.0	0.5	0.45	TB	10,000	0.65±0.05	1.15±0.05	8	2	0.6±0.04	180
	16S,16A,16V	1.6	0.8	0.4	TD	5,000	1.1±0.1	1.9±0.1	8	4	0.6+0.2/-0	180
CCF	1N, 1F	6.0	2.5	2.5	TE	1,000	2.7±0.2	6.4±0.2	12	4	2.9±0.2	180
CZB CZP	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4,000	1.1±0.1	1.8±0.1	8.1±0.1	4.0±0.1	1.1±0.1	178
	2A	2.0±0.2	1.25±0.2	0.9±0.2	TD	2,000/4,000*	1.6±0.1	2.4±0.1	8.1±0.1	4.0±0.1	1.2±0.1	178
MHL	2B	3.2±0.2	1.6±0.2	0.51±0.25	TE	3,000	1.8±0.1	3.5±0.1	8.1±0.1	4.0±0.1	1.8±0.1	178
	1E	1.0±0.1	0.5±0.1	0.5±0.1	TP	10,000	0.67±0.1	1.17±0.1	8.0±0.22	2.0±0.23	0.63±0.1	178
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4,000	1.15±0.1	1.85±0.1	8.0±0.1	4.0±0.1	1.1±0.1	178

\* CZB2A: <2200Ω=TD:4,000; 2200Ω=TD: 2,000 pcs/reel

### Packaging specifications

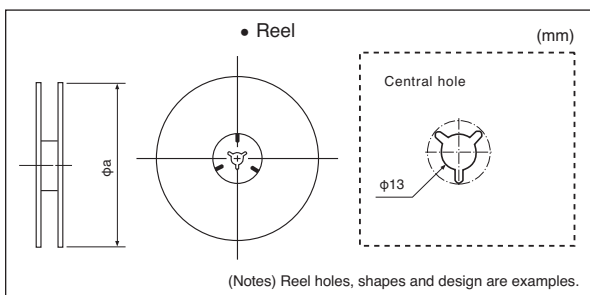

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/13/24